

APC-3X17B



Intel Socket P Duo Core Intel GM45+ ICH9M Steel Panel PC



APC-3X17B

APC-3517B/APC-3717B/APC-3917B

External I/O Port



Panel PC

Features



Intel Socket P Processor
Support up to Intel P8600
2.4GHz~T3100 1.9 GHz
Without Fan



Resistive Touch Screen
for Option



Front Panel IP65



Wide Range 9~32V DC
Input



Supports 1 x PCI Expansion Slot



APC-3X17B

Intel Socket P Duo Core Intel GM45+ ICH9M Steel Panel PC

Specifications

Model No.	APC-3517B	APC-3717B	APC-3917B
System	Intel Socket P Core 2 Duo 45nm Processor, FSB1066/800/667MHz, 6MB L2 cache, Up to P8600 2.4GHz Processor without fan		
CPU	2 x 204-pin DDR3 SO-DIMM slot, up to 8GB 800MHz SDRAM		
Memory	1 x CF slot internal via SATA interface TB-503 for option		
Storage	1 x 2.5" SATA HDD Space		
Rear side I/O port	4 x USB 2.0 Type A 2 x GbE RJ-45 LAN 1 x Audio line out/ MIC in 3.5mm Jack 1 x VGA Output 1 x HDMI Output 2 x RS-232 (COM1/COM2) 1 x DB9 RS-422/485 Default RS-485 (COM3) 1 x Terminal block for additional power switch 2 x LED light 1 x Rocker Switch for Power ON/OFF		
Graphic	Intel Integrated Graphics GMA 4500		
Expansion	1 X PCI Slot		
Power supply	Onboard 9~32V DC		
Display			
LCD	15" TFT-LCD	17" TFT-LCD	19" TFT-LCD
Max. Resolution	1024x768	1280x1024	1280x1024
Luminance (cd/m²)	300	350	300
Dimensions(W)x(H)x(D) mm	410(W)x310(H)x87.8(D) mm	439(W)x348(H)x93.3(D) mm	484(W)x400(H)x94.3(D) mm
Backlight Lifetime	50,000 hrs		
Touch Screen (Option)			
Type	Resistive Type		
Light Transmission	80%		
Mechanical			
Construction	Steel chassis		
IP Rating	Front Panel IP65		
Mounting	Panel / VESA 75x75 Mount		
Environmental			
Operating Temperature	-10~50 °C		
Storage Temperature	-20~60 °C		
Storage Humidity	10~90% @40 °C non-condensing		
Certificate	CE/FCC Class A		


APC-3X17B

APC-3517B/APC-3717B/APC-3917B


Dimensions

unit:mm

APC-3517B

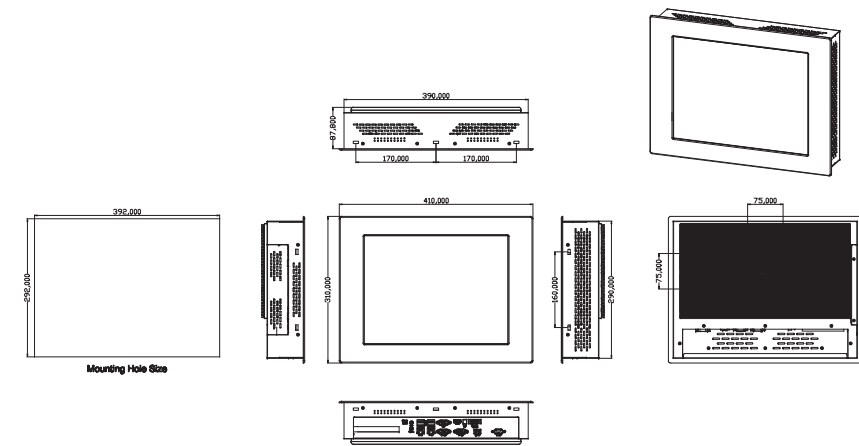

APC-3717B

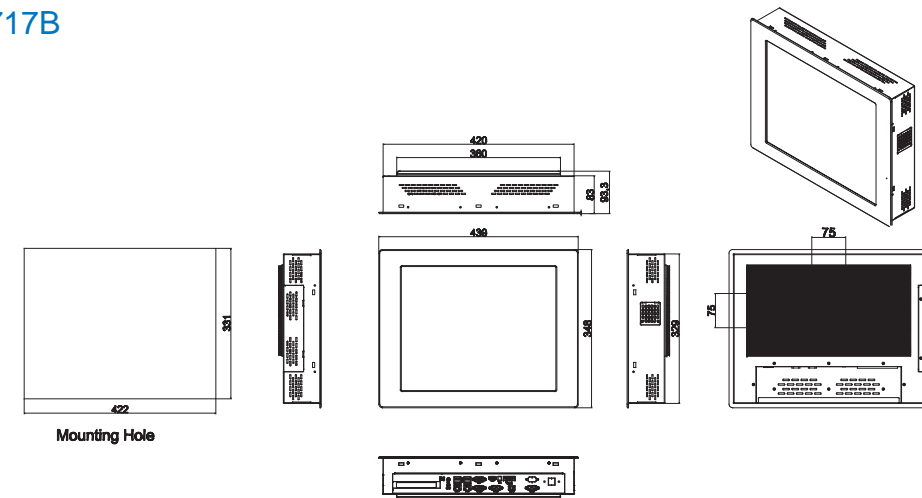

APC-3917B

