




# SOM200RD-PC



## Specifications

<b>SoC</b>	DM&P SoC CPU Vortex86DX- 800MHz Real Time Clock with Lithium Battery Backup
<b>Cache</b>	L1:16K I-Cache, 16K D-Cache, L2 Cache 256KB
<b>Bus</b>	PCI Bus standard compliant
<b>BIOS</b>	AMI BIOS
<b>System Memory</b>	256 / 512MB DDR2 Onboard
<b>Watchdog Timer</b>	Software programmable from 30.5 $\mu$ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
<b>LAN</b>	Integrated 10/100Mbps Ethernet
<b>Flash Disk Support</b>	Onboard 4MB SPI Flash Disk Onboard SST Flash Disk 512MB/1GB/2GB/4GB (Optional) MSTI EmbedDisk Module (16MB and above) 44-pin IDE to microSD (Optional)
<b>PWM</b>	24~32 Channels
<b>I2C</b>	Controlled by GP 34/35
<b>Serial Console</b>	Controlled by GP 36/37
<b>I/O interface</b>	Enhanced IDE port (UltraDMA-100/66/33) x1 RS-232 port x5 (TX/RX x1) USB port (Ver2.0) x4 16-bit GPIO port x2 10/100Mbps Ethernet port x1
<b>Connectors</b>	1.27mm 50-pin box header for signal x4 1.25mm 6-pin wafer for JTAG x1
<b>Power Requirement</b>	Single Voltage +5V @ 330mA
<b>Dimension</b>	52 (L) x 52 (W) x 10.5 (H) mm (With Cover)
<b>Weight</b>	15g
<b>Operating Temperature</b>	-20°C ~ +70°C -40°C ~ +85°C (Optional)


## Packing List

- SOM200RD52PCNE1 x 1


## Ordering Information

- SOM200RD52PCNE1** Vortex86DX SOM200 CPU module w/256MB DDR2
- SOM200RD52PCBE1** Vortex86DX SOM200 CPU module w/256MB DDR2, NAND Flash 512MB
- SOM200DX-DEV-PC** SOM200RD-PC Development Board
- MiniPCI-VGA-Z9s** XGI Z9s VGA/LVDS MiniPCI Display Board
- PCI-MiniPCI** PCI to MiniPCI Converter

### SOM200DX-DEV-PC Development Kit

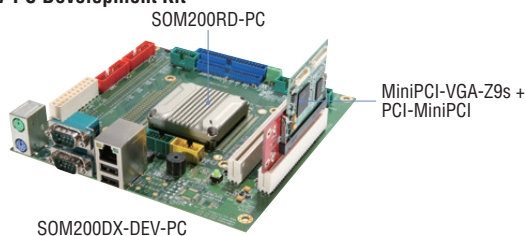

# SOM200SX-PC



## Specifications

<b>SoC</b>	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
<b>Cache</b>	L1:16K I-Cache, 16K D-Cache
<b>Bus</b>	PCI Bus standard compliant
<b>BIOS</b>	AMI BIOS
<b>System Memory</b>	128MB DDR2 Onboard
<b>Watchdog Timer</b>	Software programmable from 30.5 $\mu$ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
<b>LAN</b>	Integrated 10/100Mbps Ethernet
<b>Flash Disk Support</b>	Onboard 2MB SPI Flash Disk Onboard SST Flash Disk 512MB/1GB/2GB/4GB (Optional) MSTI EmbedDisk Module (16MB and above)
<b>Serial Console</b>	Controlled by GP 36/37
<b>I/O interface</b>	Enhanced IDE port x1 RS-232 port x5 (TX/RX x1) USB port (Ver2.0) x4 16-bit GPIO port x2 10/100Mbps Ethernet port x1
<b>Connectors</b>	1.27mm 50-pin box header for signal x4 1.25mm 6-pin wafer for JTAG x1
<b>Power Requirement</b>	Single Voltage +5V @ 300mA
<b>Dimension</b>	52 (L) x 52 (W) x 10.5 (H) mm (With Cover)
<b>Weight</b>	15g
<b>Operating Temperature</b>	-20°C ~ +70°C -40°C ~ +85°C (Optional)

## Packing List

- SOM200SX31PCNE1 x 1

## Ordering Information

- SOM200SX31PCNE1** Vortex86SX SOM200 CPU module w/128MB DDR2
- SOM200SX31PCBE1** Vortex86SX SOM200 CPU module w/128MB DDR2, NAND Flash 512MB
- SOM200SX-DEV-PC** SOM200SX-PC Development Board
- MiniPCI-VGA-Z9s** XGI Z9s VGA/LVDS MiniPCI Display Board
- PCI-MiniPCI** PCI to MiniPCI Converter

### SOM200SX-DEV-PC Development Kit

