



DATA SOUND - LABORATORIES -


.....
EMBEDDING THE FUTURE



**Electronic
Design**



**Panel
PC / HMI**



**Single Board
Computer**



**Industrial
PC**

Why choose DSL?

- Over 25 Years Industry Experience
- 5 Years Warranty on all Products
- Evaluation Products Available
- Lifetime Technical Support

Our Services

- Electronic Design
- Production Management
- Assembly and Test
- Bespoke BIOS Creation
- Industrial Embedded PC Solutions



Call us on +44(0)1462 675330



Email us at sales@dsl-ltd.co.uk



www.dsl-ltd.co.uk



Features

- 19" color TFT LCD
- Fanless Design
- Intel Celeron N2930 1.83GHz Processor (E3845 Processor for option)
- Onboard 2GB DDR3L
- 9~36V DC Wide-ranging Power Input
- 5 Sides IP65
- 5-wire Resistive Touch Screen



Specifications

System	
Processor	Onboard Intel Celeron N2930(1.83GHz) Onboard Intel Atom E3845(1.91GHz) for option
System Chipset	SoC
System Memory	Onboard 2GB DDR3L SDRAM Onboard 4GB DDR3L SDRAM for option
Storage	1 x 2.5" HDD Space 1 x Internal SD slot onboard

External I/O	
USB	3 x USB 2.0 type A 1 x USB 3.0 type A
Serial/Parallel	1 x RS-232/422/485 DB-9 selectable, Default RS-485, COM1 2 x RS-232 DB-9, COM2 and COM3
Audio	2 x Line-out, phone jack
LAN	2 x GbE LAN RJ-45
Power	1 x 3-pin terminal block connector 1 x Power Switch on/off


Expansion	
On board expansion bus	1 x Mini PCIe full size Optional WiFi/BT with Antenna

LCD	
Display Type	19" TFT LCD
Max. Resolution	1280 x 1024
Max. Color	16.7M
Contrast Ratio	1000:1
Luminance (cd/m ²)	350
View Angle	H: 170 / V: 160
Backlight Lifetime	50,000 hrs

Touch Screen	
Type	Resistive Touch Window
Interface	USB
Light transmission (%)	80%

Power	
Power input	9~36V DC
Power Consumption	MAX: 26.7W

Dimensions

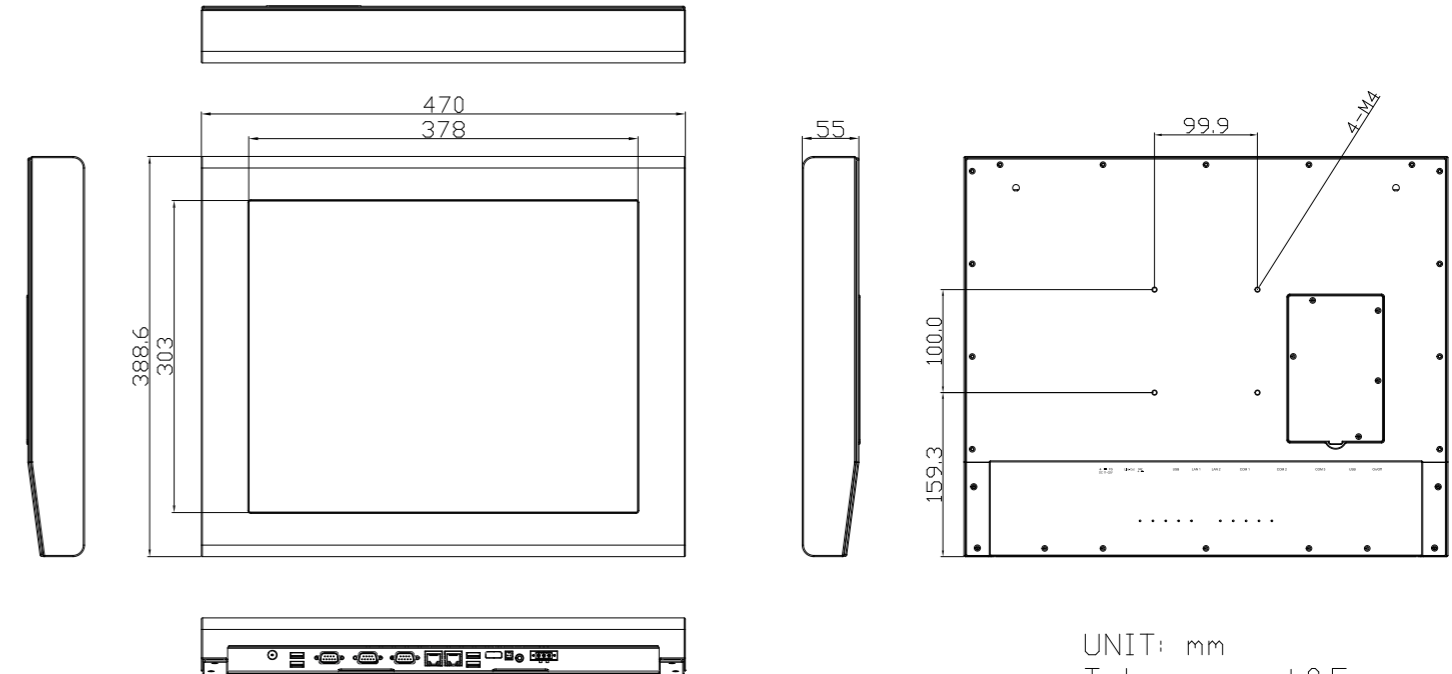

UNIT: mm
Tolerance: ±0.5

Mechanical	
Chassis Color	Stainless Steel Chassis
IP Rating	5 sides IP65 with I/O cover
Mounting	VESA Mount 100x100
Dimension	470 x 388.6 x 55 mm
Net Weight	9.4Kg

Environmental	
Operating temperature(°C)	0~50°C
Storage temperature(°C)	-30°C~70°C
Storage humidity	10 to 90% @ 40°C, non- condensing
Certificate	CE / FCC Class A

Operating System Support	
Windows 7 Professional for Embedded Systems, Windows 7 Ultimate for Embedded System, Windows Embedded 8.1 Pro, Windows Embedded 8.1 Industry pro	

Ordering information	
APC-3984BT (Barebone)	19" SXGA 5 sides IP65 Intel Celeron N2930 1.83G Fanless Panel PC, DDR3L 2G onboard, Resistive touch, 9~36V DC power input with adaptor, stainless steel enclosure
APC-3984BT-01	19" SXGA 5 sides IP65 Intel Celeron N2930 1.83G Fanless Panel PC, DDR3L 2G onboard, 320G SATA HDD, Resistive touch, 9~36V DC power input with adaptor, stainless steel enclosure