




DATA SOUND - LABORATORIES - EMBEDDING THE FUTURE



**Electronic
Design**



**Panel
PC / HMI**



**Single Board
Computer**



**Industrial
PC**

Why choose DSL?

- Over 25 Years Industry Experience
- 5 Years Warranty on all Products
- Evaluation Products Available
- Lifetime Technical Support

Our Services

- Electronic Design
- Production Management
- Assembly and Test
- Bespoke BIOS Creation
- Industrial Embedded PC Solutions



Call us on +44(0)1462 675530



Email us at sales@dsl-ltd.co.uk



www.dsl-ltd.co.uk

ADP-1XX4

Steel Enclosure Display

- ◎ APLEX Standard Industrial Display
- ◎ OSD Function Key
- ◎ Front Bezel IP65
- ◎ Resistive Touch Screen for Option
- ◎ Wide Range 11~32V DC Power Input

About Features




OSD



IP65
F Panel



Touch
Screen




11~32V
DC Power




0~50°C



Wide Temp
Option



LED



AC DC
88%




APELX standard type
black chassis display




Front bezel IP65 Rating



Support panel & VESA mount

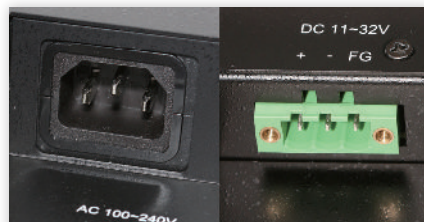

AC power and
11~32V DC power selection

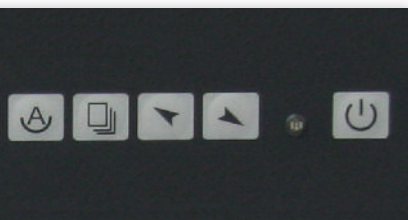

Easy to use function key



Steel enclosure

ADP-1XX4

Steel Enclosure Display





Specifications

Model Name	ADP-1154	ADP-1174	ADP-1194	ADP-1224
I/O Port				
VGA			1	
DVI			Option	
HDMI			None	
S-Video			Option	
OSD Control Membrane			5 Keys	
Other			RS-232 or USB Interface for Touch	
Power connector			AC inlet / 3 pins Terminal Block for Option	
Display				
Display type	15" TFT-LCD	17" TFT-LCD	19" TFT-LCD	21.5" TFT-LCD
Max. resolution	1024 x 768	1280 x 1024	1280 x 1024	1920 x 1080
Max. color	262K	16.7M	16.7M	16.7M
Luminance(cd/m ²)	350	300	300	400
View angle(H°/V°)	150/140	140/130	160/160	170/160
Contrast	800:1	1000:1	1000:1	1000:1
Backlight lifetime(hrs)	50000	40000	20000	40000
Touch Screen				
Type			Resistive Touch	
Interface			RS232 or USB	
Light transmission(%)			80%	
Power				
Power input			90~240V AC Input, Option:11~32V DC Input	
Power Consumption	Max:25.3W	Max:27.5W	Max:27.5W	Max:45W
Mechanical				
Construction			Black Steel	
IP rating			IP65 Front Bezel	
Mounting			Panel Mounting, VESA 75 x 75	Panel Mounting, VESA 100 x 100
Dimension(mm)	410 x 310 x 59.7	439 x 348 x 63	467 x 379 x 68	557 x 362 x 68
Net weight(Kg)	6.1	6.9	7.6	15.3
Environment				
Operating temperature(°C)			0~50	
Storage temperature(°C)			-20~60	
Storage humidity			10 to 90% @ 40°C, non- condensing	
Certification			CE/FCC class A	

ADP-1XX4

Steel Enclosure Display

Dimensions

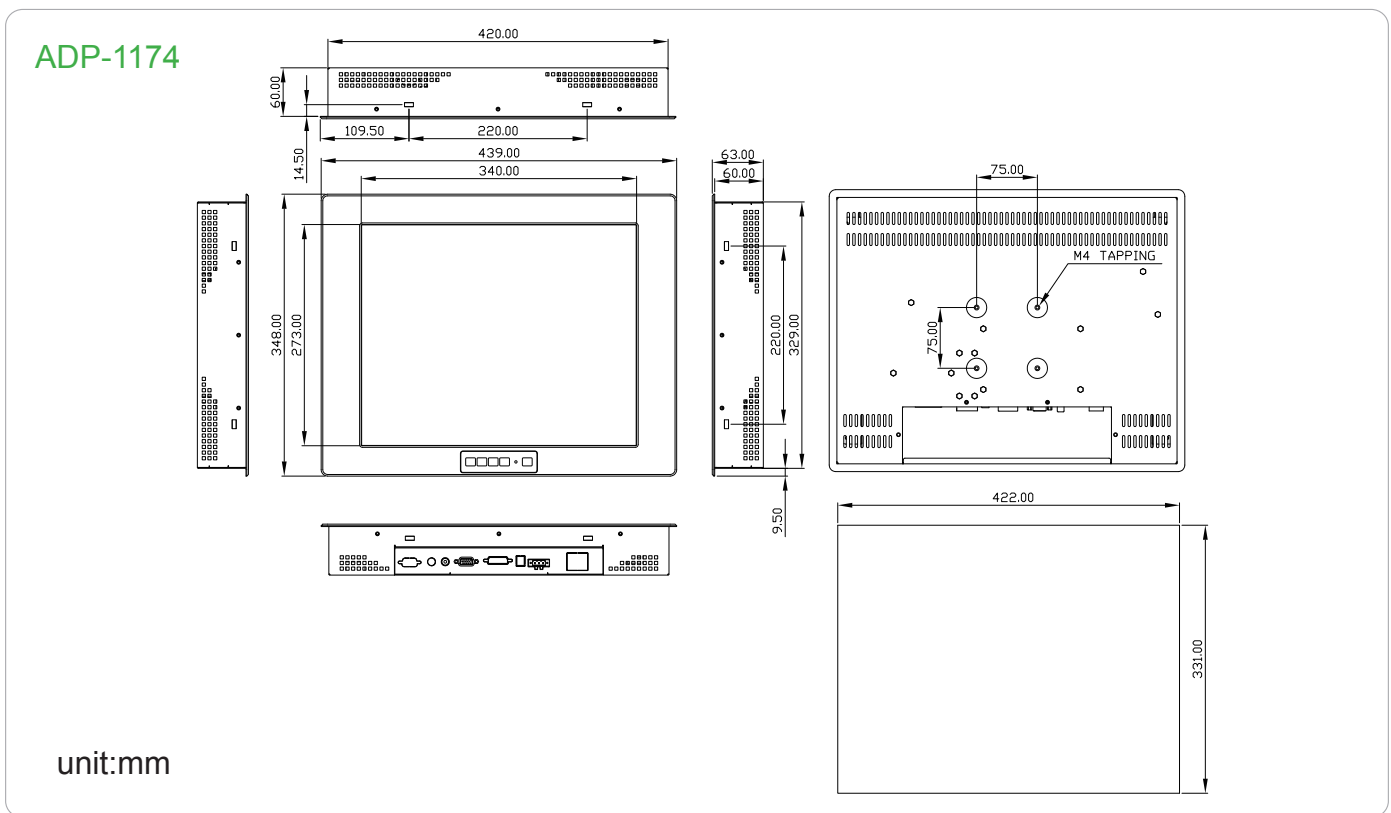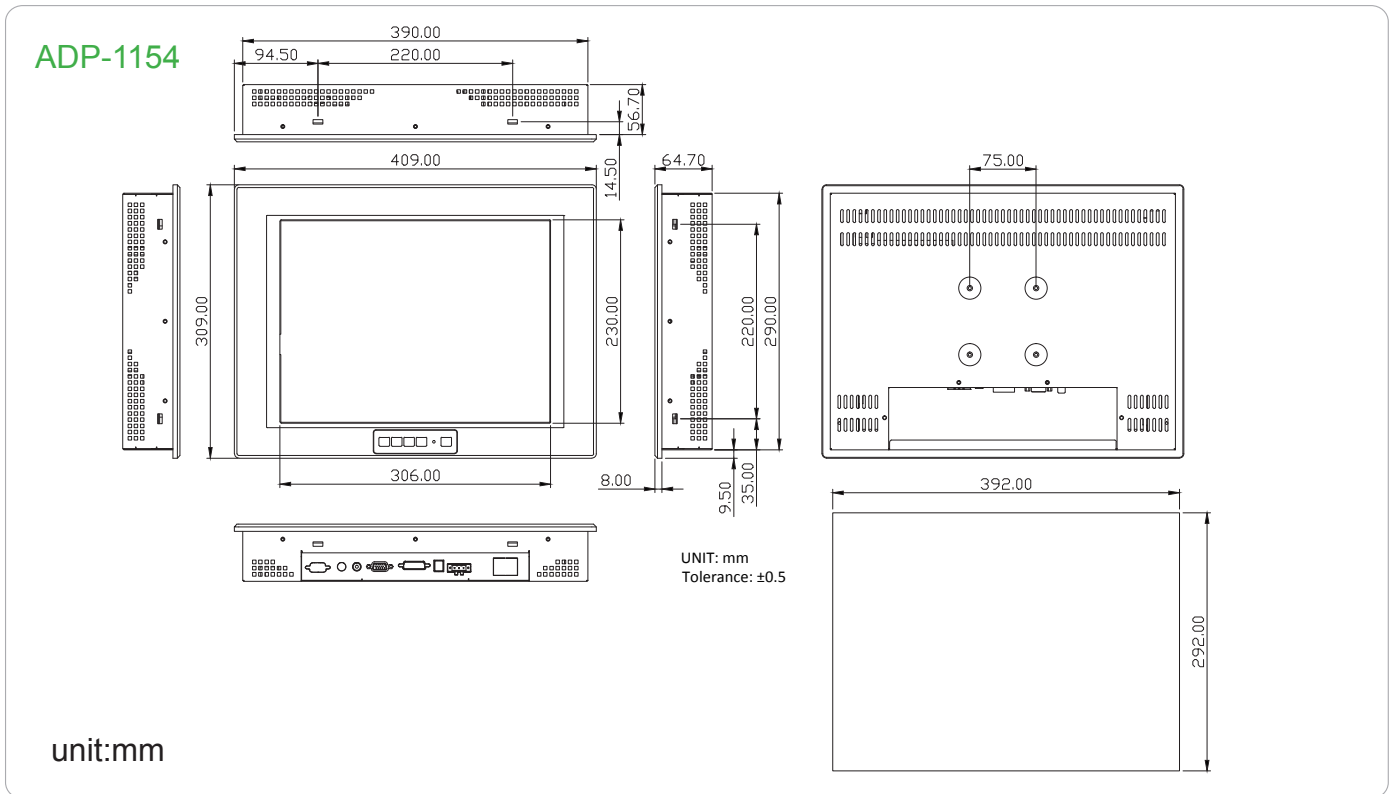



Ordering information

Model NO.	Description
ADP-1154-15	15" XGA Industrial Display ,VGA input, OSD on front side, AC 100~240V power input, and without touch, steel enclosure
ADP-1174-05	17" SXGA Industrial Display , OSD on front side, AC 100~240V power input, and without touch, steel enclosure

ADP-1XX4

Steel Enclosure Display

Dimensions

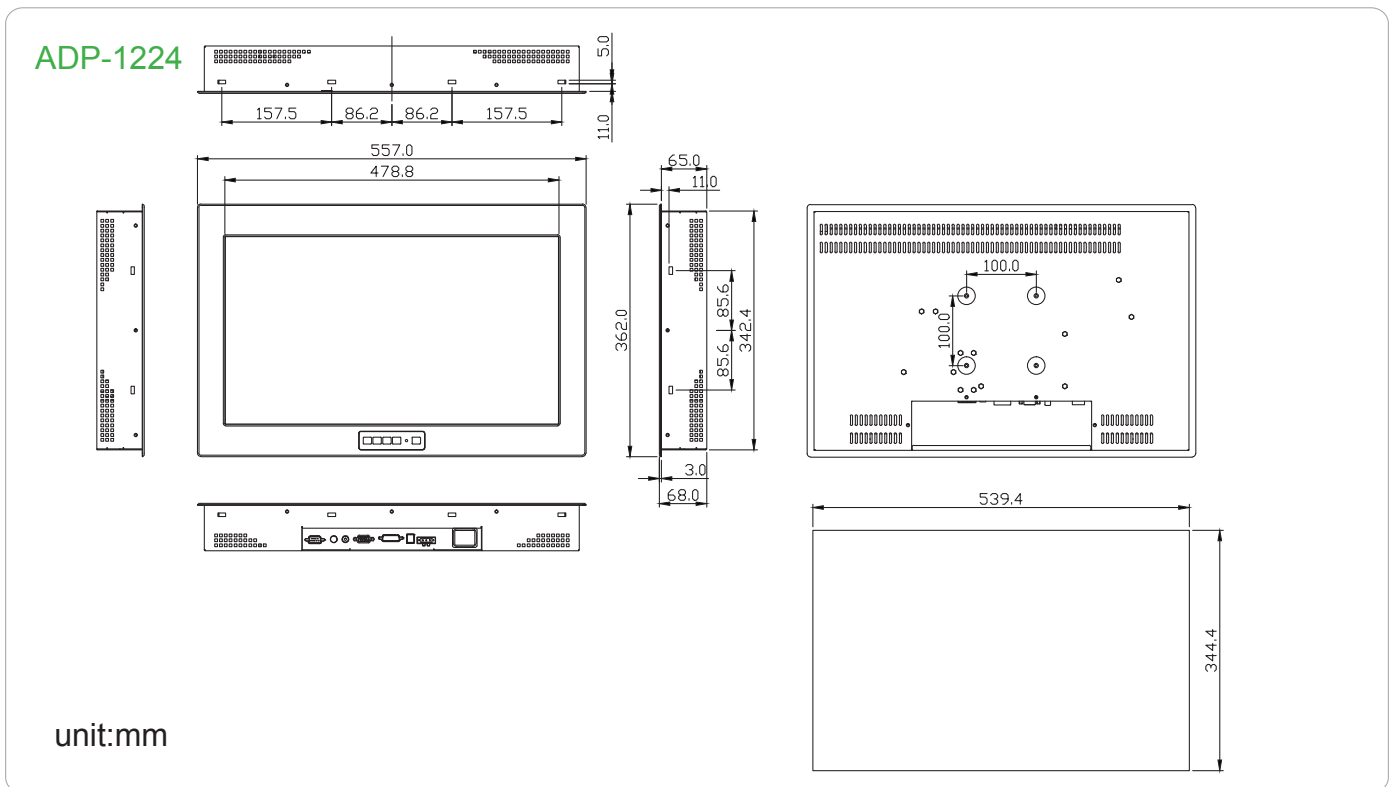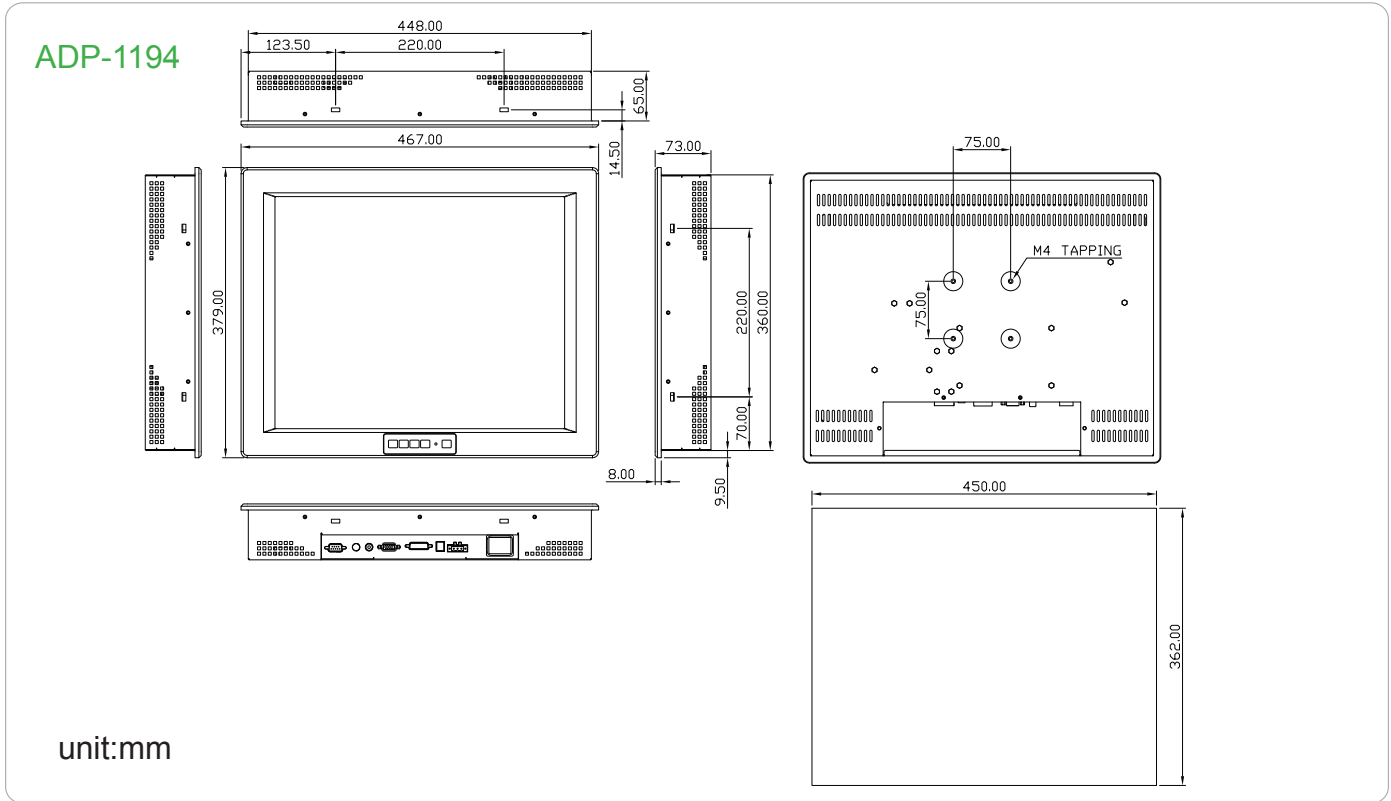

Ordering information

Model NO.	Description
ADP-1194-06	19" SXGA Industrial Display, VGA input, OSD on front side, AC 100~240V power input, and without touch, steel enclosure
ADP-1224A-04	21.5" Full HD Industrial Display, 400 nits brightness, VGA input, OSD on front side, AC 100~240V power input and without touch, steel enclosure